ArtiTeq®

BACK FRAME HANGING SYSTEM

FLEXIBEL HANGING SOLUTIONS

ARTITEQ.COM

ArtiTeq®

BACK FRAME HANGING SYSTEM

Artiteq has specialised in hanging concepts since 1995. A good hanging system is essential for displaying art and giving rooms a stylish look. A system isn't just about hanging: a professional system makes it easy to develop different settings, therefore creating new experiences.

Artiteq is for professionals and consumers who want the guarantee of a safe yet flexible way to hang art, frames and wall decorations. As a partner in hanging solutions, Artiteq has a presence in the educational sector, the healthcare sector and in galleries and museums. Our innovative hanging systems are also used in offices and commercial environments, making an impact with information and decorations..

Artiteq not only looks at the hanging system itself. The back of a frame, painting or printed panel made of glass or Dibond plays an important role. Artiteq's range also offers the Back Frame Hanging System, a solid and simple solution for hanging printed panels.

ARTITEQ BACK FRAME HANGING SYSTEM

A **safe** and **solid** solution for hanging printed panels.

Adds **depth** and **shadow** between panel and wall.

Adds **rigidity** to flexible panels made of aluminium (Dibond), forex or acrylic.

The Back Frame Hanging System is available in 8-mm and 15-mm profi les, in either an alu mill or silver anodised fi nish.

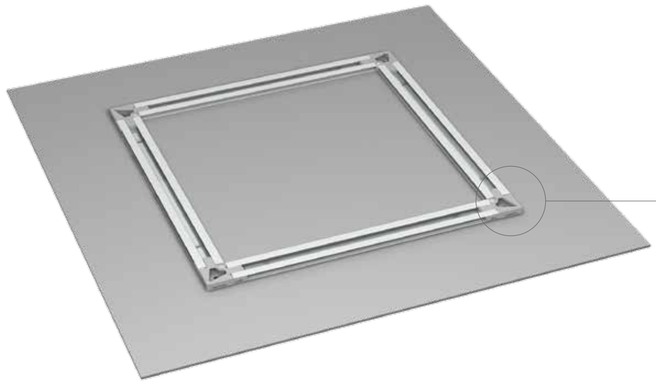

The Back Frame Hanging System is a mounting system especially for thin and fl exible panels made of aluminium, forex or acrylic. It helps to stiff en the panel, whilst mounting remains easy and safe. The levelling system provided by the Back Frame Power Corners is perfect for mounted panels, allowing adjustment of the panel by up to 6 mm. The panel will always be level without new holes having to be drilled.

BACK FRAME POWER CORNERS

1. WALL PROTECTION INCORPORATED

Wall protection is incorporated into the Back Frame Power Corners.

2. BETTER LOAD CAPACITY



The Back Frame Power Corners ensure equal weight distribution because of the rigid fixing achieved by a steel spring in square-cut profi les, instead of mitre-cut profi les.

3. EASY HANGING: 3 OPTIONS

The Back Frame Power Corners provide 3 easy ways of hanging the printed panel: Fixed (1), Secured (2) and Flexible (3).

4. NO EXTRA ACCESSORIES NEEDED

The printed panel is hung using the Power Corners, no extra accessories are needed.



1. EASY HANGING: FIXED

With the Easy Hanging 1 / Fixed, the printed panel is attached to the wall with two screws. With this option, the panel hangs from the screws with the Back Frame Power Corners.

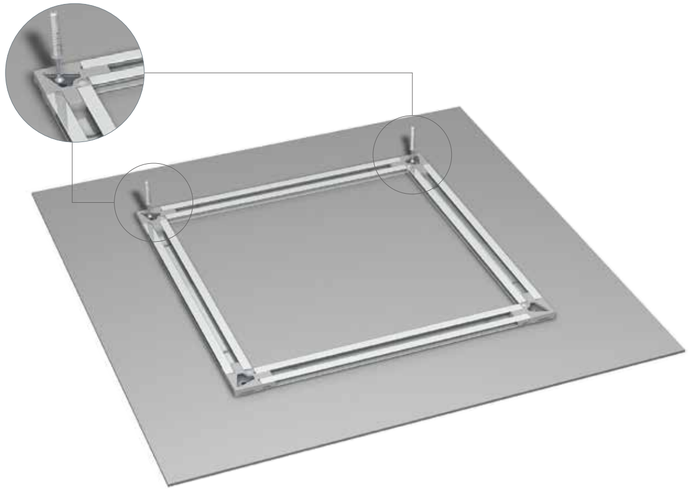



The Back Frame Power Corners come with an easy drilling tool, which indicates the precise positioning of the drill holes.

The Back Frame Power Corners allow for easy level the panel easily (up to 6 mm correction possible).

2. EASY HANGING: SECURED

With the Easy Hanging 2 / Secured, the printed panel is attached to the wall with two screws and hangs from the top two Security Clips.

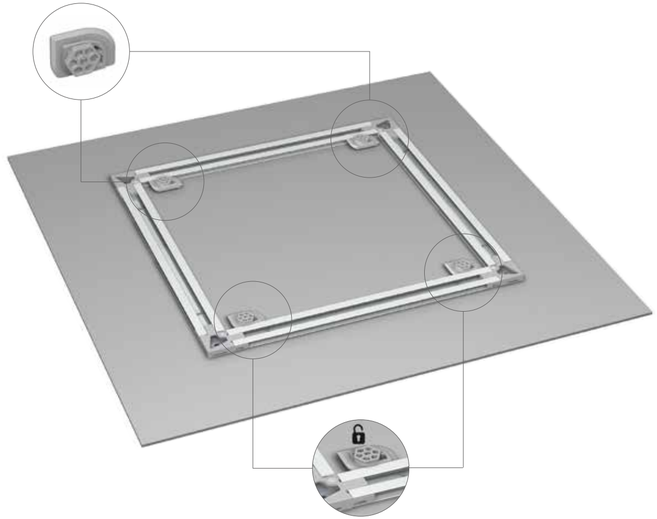

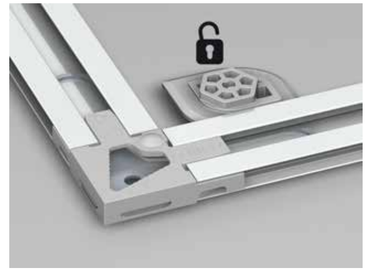

The panel can be fixed and secured to the wall using 4 Back Frame Security Clips.

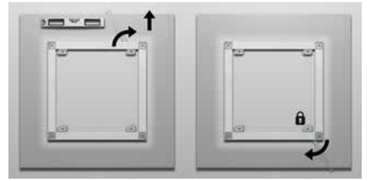

The frame hangs from the upper two Security Clips and the two lower Clips, once rotated using the Security Key, lock the frame into place.

3. EASY HANGING: FLEXIBLE

With the Easy Hanging 3 / Flexible, the Back Frame Hanging System is used in combination with an Artiteq picture hanging system. This uses hanging wires and hanging hooks.

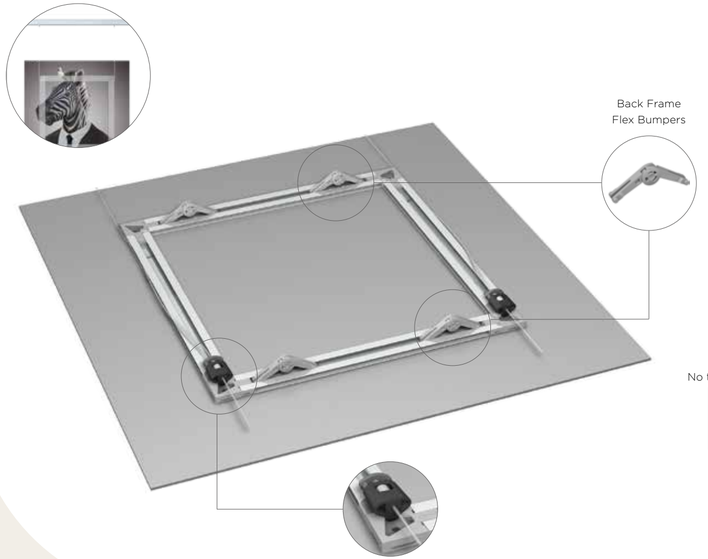



Combining the Back Frame Hanging System with a picture hanging system means fl exibility and ease-of-use whilst adding decoration to walls. The hanging wire is inserted into the Power Corner and picture hooks are placed in the lower Power Corners to minimise tilting.



To eliminate tilting altogether, we recommend using the Back Frame Flex Bumpers that will add more or less depth and stabilise the frame against the wall.

WHY USE A PICTURE HANGING SYSTEM?

- Flexible wall decoration (always)
- Ease of use (hanging with no drilling)
- Sustainable building management (preserve walls)
- Once-only investment & assembly

ARTITEQ BACK FRAME HANGING SYSTEM

The Back Frame Hanging System is available in 8-mm and 15-mm profi les, in either an alu mill or silver anodised fi nish.

BACK FRAME HANGING SYSTEM RAIL 8MM

Back Frame Rail 8 mm 300 cm Alu Mill Finish	Back Frame Rail 8 mm 300 cm Silver Anodised	Back Frame Power Corner 8 mm (set of 4)
05.16300	**05.16301**	**05.16010**

BACK FRAME HANGING SYSTEM RAIL 15MM

Back Frame Rail 15 mm 300 cm Alu Mill Finish	Back Frame Rail 15 mm 300 cm Silver Anodised	Back Frame Power Corner 15 mm (set OF 4)
05.17300	**05.17301**	**05.17010**

BACK FRAME HANGING SYSTEM ADDITIONS

Tape 3M 12 mm 33 m	3M VHB cleaning wipes	Back Frame Security Key	Back Frame Flex Bumper	Back Frame Security Clip (4 clips, 4 plugs, 4 screws)
05.16050	**05.16055**	**05.16030**	**05.16040**	**05.16060**

Scan QR for video

SET BACK FRAME HANGING SYSTEM ON LENGTH INCLUDING 3M TAPE MOUNTED

2x

Set 2x Back Frame Rail 8 mm x 344 mm Alu Mill Finish (40cm)	Set 2x Back Frame Rail 8 mm x 444 mm Alu Mill Finish (50cm)	Set 2x Back Frame Rail 8 mm x 544 mm Alu Mill Finish (60cm)	Set 2x Back Frame Rail 8 mm x 644 mm Alu Mill Finish (70cm)	Set 2x Back Frame Rail 8 mm x 744 mm Alu Mill Finish (80cm)	Set 2x Back Frame Rail 8 mm x 844 mm Alu Mill Finish (90cm)	Set 2x Back Frame Rail 8 mm x 944 mm Alu Mill Finish (100cm)	Set 2x Back Frame Rail 8 mm x 1044 mm Alu Mill Finish (110cm)
05.16725	**05.16726**	**05.16735**	**05.16745**	**05.16746**	**05.16755**	**05.16756**	**05.16765**

* Set does not include Power Corners 8 mm

SET 4X POWER CORNERS 8MM

+

05.16010

ARTITEQ BACK FRAME HANGING SYSTEM

A

For the correct sizing and positioning of the Back Frame Hanging System, we recommend placing the profi les at 100 mm from each side of the printed panel. When glueing the profi les to the back of the printed panels, we recommend using 3M tape (article number 05.16050).

B

The 8-mm and 15-mm profi les for the Back Frame Hanging System can also be mitre-cut. The profi les will fit with a wide range of accessories available on the market.

C

We recommend using 3M tape (general advice 3M: 25 cm2/kg) for printed panels made of aluminium, hardfoam, forex, acrylic and glass. The information in the table below applies when Back Frame Hanging System profi les are applied at a maximum of 100 mm from each side of the printed panel (see A). The information in the table applies to panels with a maximum total weight of 30 kg and a minimum size of 400 x 400 mm.

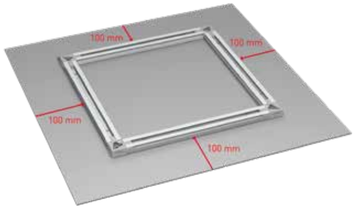

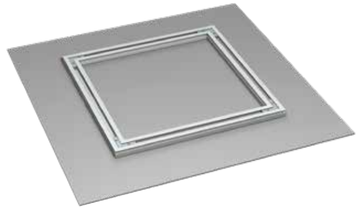

MATERIAL	THICKNESS	TAPE	FOR SURFACE:
Dibond	3-6 mm	Single 12 mm	Up to 4 m²
Forex	3-5 mm	Single 12 mm	Up to 4 m²
Acryl	3-5 mm	Single 12 mm	Up to 4 m²
Glass	6 mm	Double 24 mm	Up to 2 m²

Single tape

Double tape

FLEXIBEL HANGING SOLUTIONS

ARTITEQ
Herastraat 39
5047 TX Tilburg
The Netherlands

+31 (0)13 572 90 70
info@artiteq.com
artiteq.com